

Installation Instructions

Size C BILCO Basement Door Extensions


(Used to increase the length when required to fit a longer stairwell)

1. First assemble the size C BILCO door in accordance with the installation instructions in the door hardware package.
2. The extension assembly consists of three parts: left side panel, right side panel, and cover panel. With the non-flanged portion of the extension side panels facing upward and the oval holes facing the basement door as shown, fasten the extension side panels to the back angle of the BILCO Door side pieces with the 1/4"-20 x 1/2" bolts and nuts provided.
3. Install cover panel so *flanges overlap* the side panels and the header flange of the BILCO Door. Secure this with 1/4" -20 x 1/2" bolts, with nuts on inside.
4. Follow Basement Door instructions for installation of extension header against masonry building or to fit it properly under the shingles or clapboards on a frame building.
5. Using holes provided at bottom of each side panel, fasten extension to concrete using 1-1/2" nail driven anchors as described in Basement Door instructions. (*Note: 24" & 30" sides panels have two holes, 12" & 18" side panels have one hole and 6" side panels have no holes as concrete anchorage is not required*).
6. When caulking around the exterior of the BILCO Door and extension be sure to caulk where side pieces join extension.
7. BILCO extension panels are supplied in either a red oxide primer or powder coat paint finish. If your extension panels have a powder coat finish, no additional finishing is required. **Important:** Extension panels supplied with a primer must be painted within forty-five days of installation. See paint label on the interior of the basement door leaf or go to www.bilco.com for complete painting instructions.


Hardware Supplied with Extension	
(13)	1/4" -20 x 1/2" round head bolts
(13)	1/4" nuts
(8)	1/4" x 1-1/2" Nail driven anchors

Extension Size	Shipping Weight
6"	26 lbs.
12"	41 lbs.
18"	58 lbs.
24"	73 lbs.
30"	91 lbs.

Installing One Extension Panel

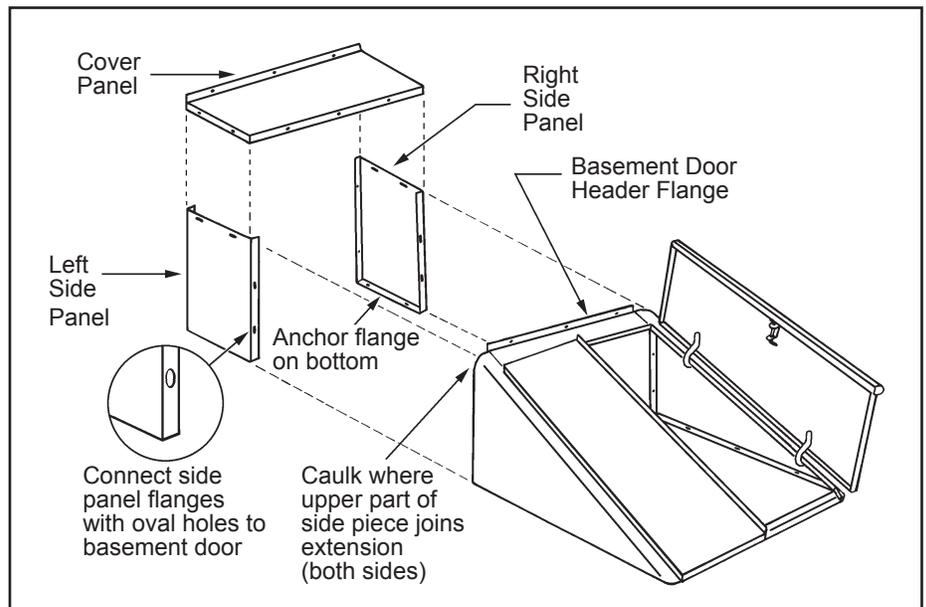

Installing Multiple Extension Panels

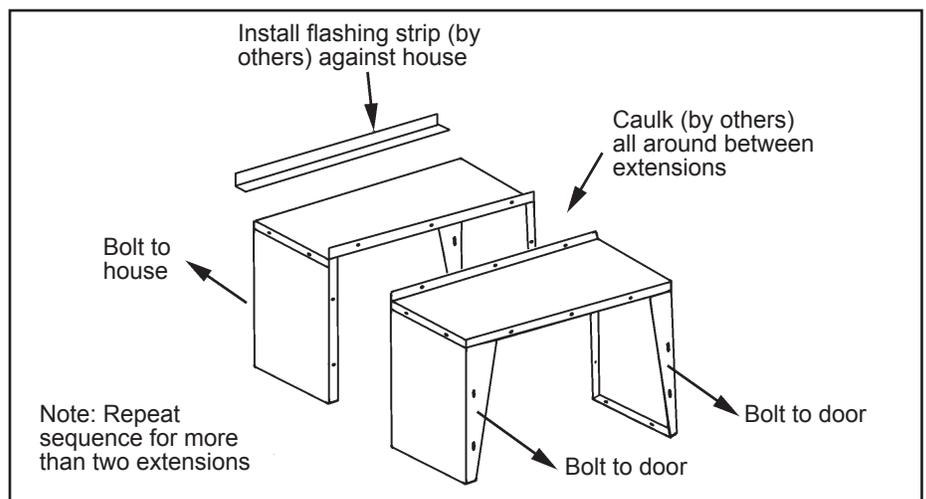

Installing Multiple Extension Panels

To install two standard extensions, of any length, back to back. Note that the front of the second extension is then against the house and the rear flange extends downward rather than up. Extreme care is required to apply caulking between the joint with the house in order to avoid leakage. Flashing over the extension is a good precaution. With two 24 inch extensions and the Size C Door, areaways up to almost ten feet long can be accommodated.



an Amesbury Truth company

Customer Service:

(800)854-9724

E-mail: residential@bilco.com

www.bilco.com