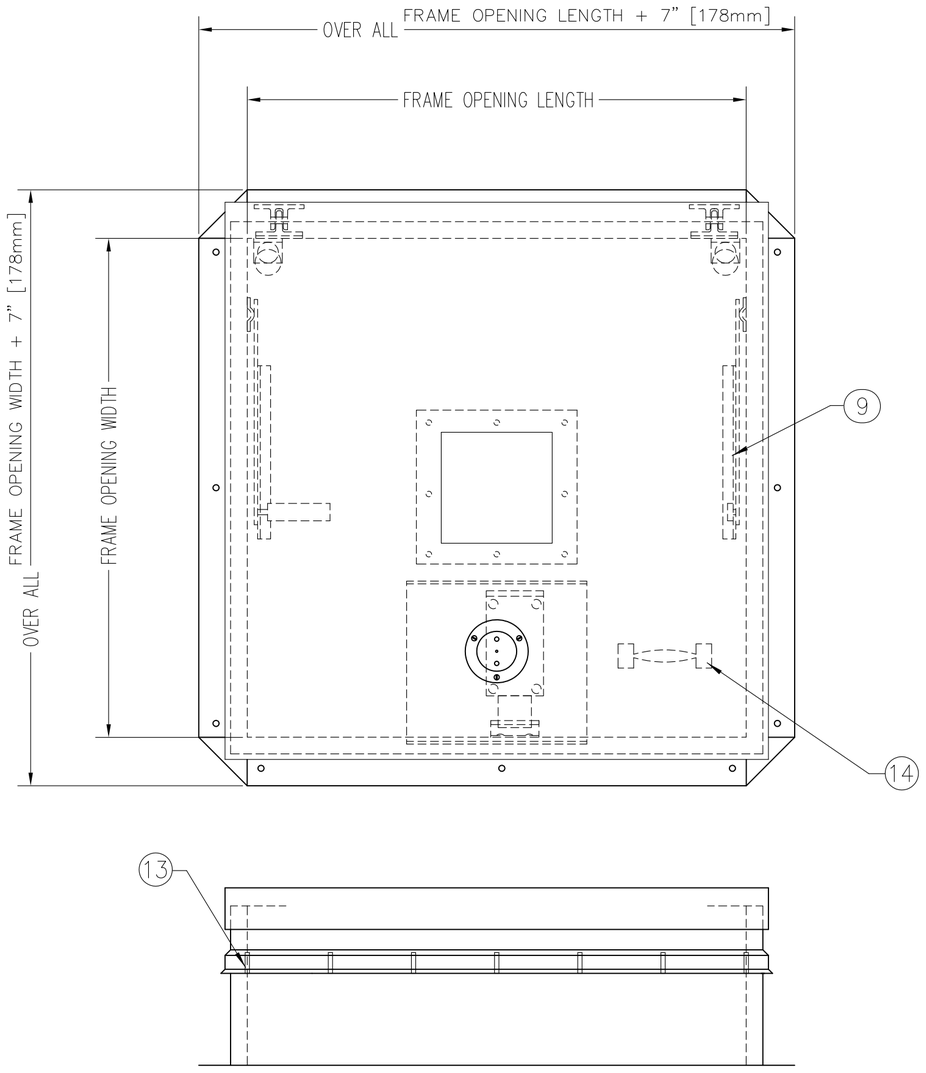

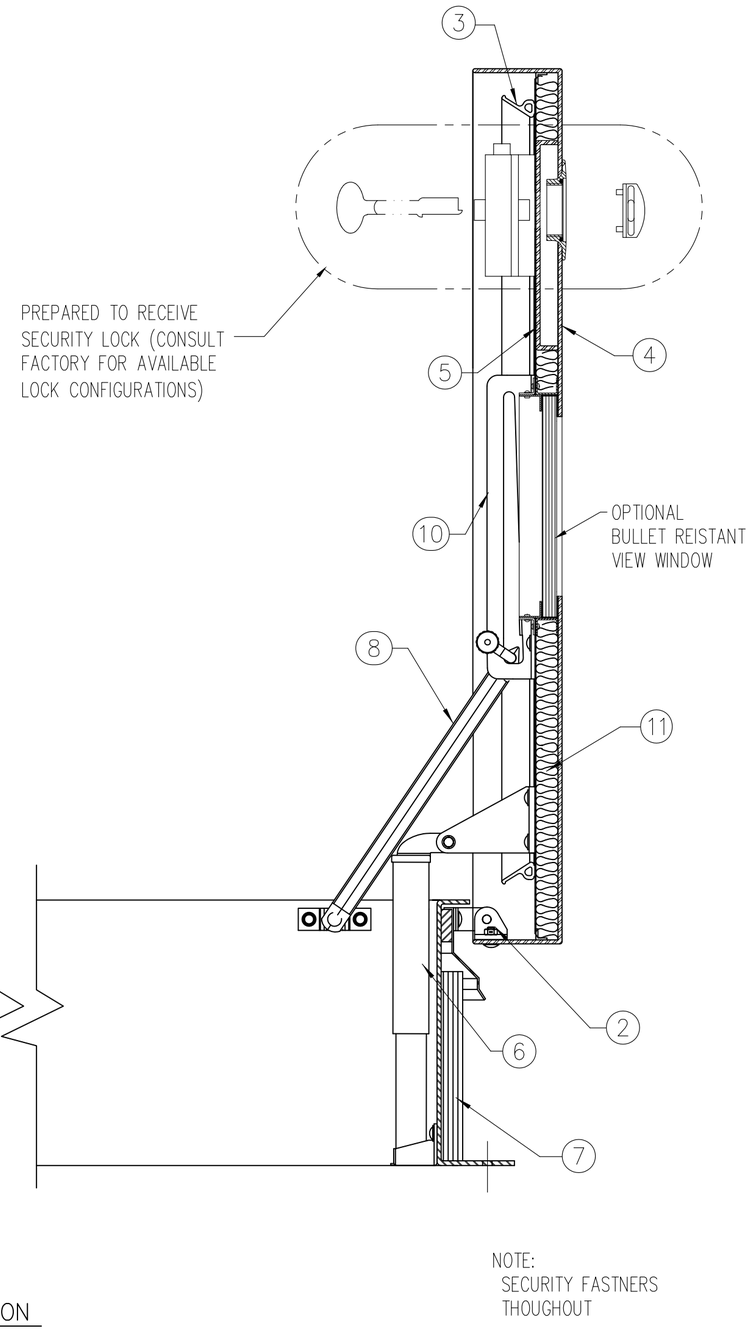

SECTION

NOTE:
SECURITY FASTNERS THOUGHOUT

THIS DRAWING IS THE PROPERTY OF THE BILCO COMPANY AND INCORPORATES INFORMATION WHICH IS PROPRIETARY. PUBLICATION AND/OR PUBLIC DISTRIBUTION IN WHOLE OR IN PART IS EXPRESSLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF THE BILCO COMPANY. THE INFORMATION CONTAINED HEREIN REMAINS THE PROPERTY OF THE BILCO COMPANY. ALL RIGHTS RESERVED.

SPECIFICATIONS

1. FRAME W/ CAPFLASHING (CORNERS FULL WELDED)
   - SS–20C – 3/16" STEEL
   - SS–50C – 3/16" ALUMINUM
2. HEAVY DUTY MANGANESE BRONZE HINGES
3. GASKET (ALL AROUND COVER)
4. COVER GAUGE
   - SS–20C – 3/16" STEEL
   - SS–50C – 3/16" ALUMINUM
5. COVER LINER
   - SS–20C – 22 GAUGE P.B. GALV. STEEL
   - SS–50C – 18 GAUGE ALUMINUM
6. LIFTING MECHANISM WITH COMPRESSION SPRINGS
7. 1" RIGID FIBERBOARD INSULATION
8. HOLD OPEN ARM W/ RED VINYL GRIP
9. GUIDE ARM (IF REQ'D)
10. ARM GUIDE BRACKET
11. 1" THICK FIBERGLASS COVER INSULATION
12. LOCK STRIKE
13. BILCLIP® FLASHING SYSTEM
14. GRAB HANDLE

SHOP FINISH:
STEEL: RED OXIDE PRIMER
ALUMINUM: MILL FINISH
HARDWARE: ZINC PLATED & CHROMATE SEALED
(UNLESS OTHERWISE SPECIFIED)

THIS PRODUCT MAY BE INSTALLED ON EITHER A FLAT OR SLOPING ROOF. WHEN INSTALLED ON A SLOPE, THE HINGE SIDE MUST RUN PARALLEL WITH THE SLOPE. IF SLOPE EXCEEDS 30°, ADVISE FACTORY FOR MODIFICATION.

CUSTOMER:

P.O. N°

JOB:

SALES REP:

Manufacturers of Doors for Special Services
THE BILCO COMPANY
New Haven, Connecticut 06505

SECURITY SERIES ROOF SCUTTLE

TYPE SS-C SIZE ____ x ____
WIDTH x LENGTH HINGE SIDE

QTY	TYPE	METAL
☐	SS-20C	STEEL COVER/STEEL FRAME
☐	SS-50C	ALUM. COVER/ALUM. FRAME

FOR SIZE LIMITATIONS ON THIS UNIT, CONSULT FACTORY

© 06-01-12 THE BILCO COMPANY