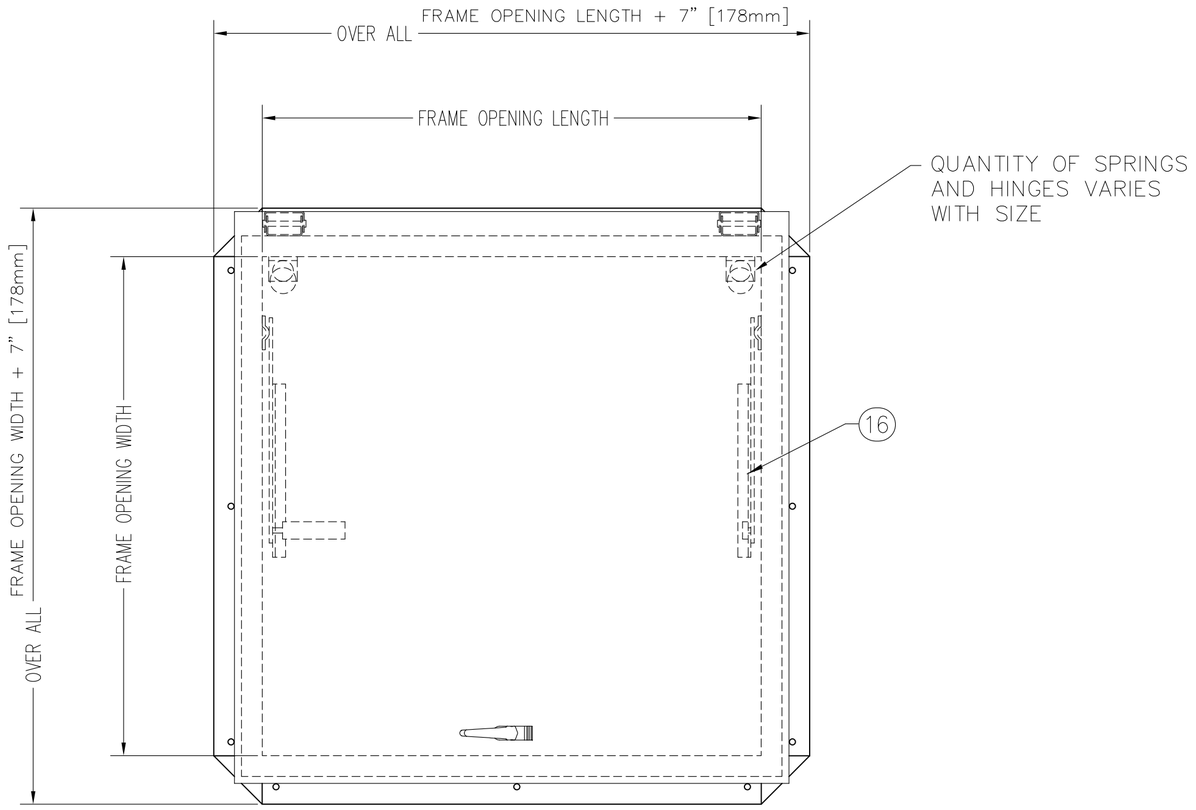

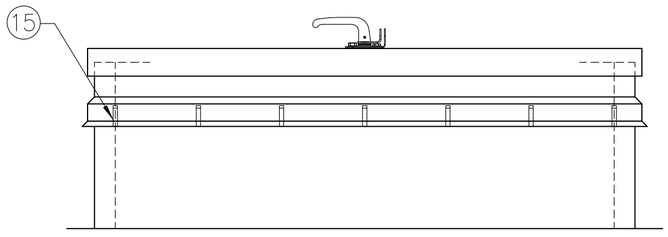



NOTE:
UNITS 7'–0" IN LENGTH & OVER WILL BE SUPPLIED WITH A TWO POINT LOCK

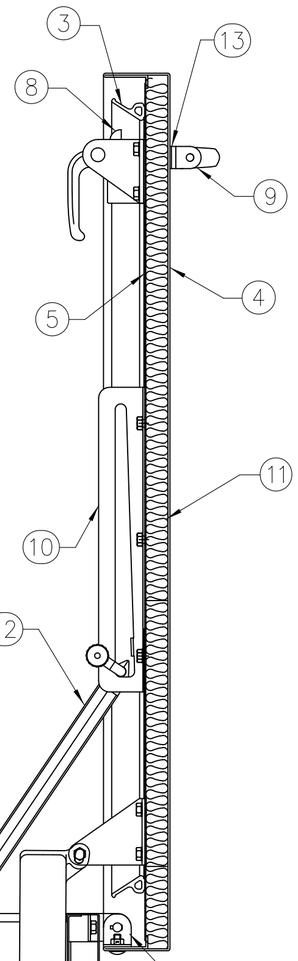

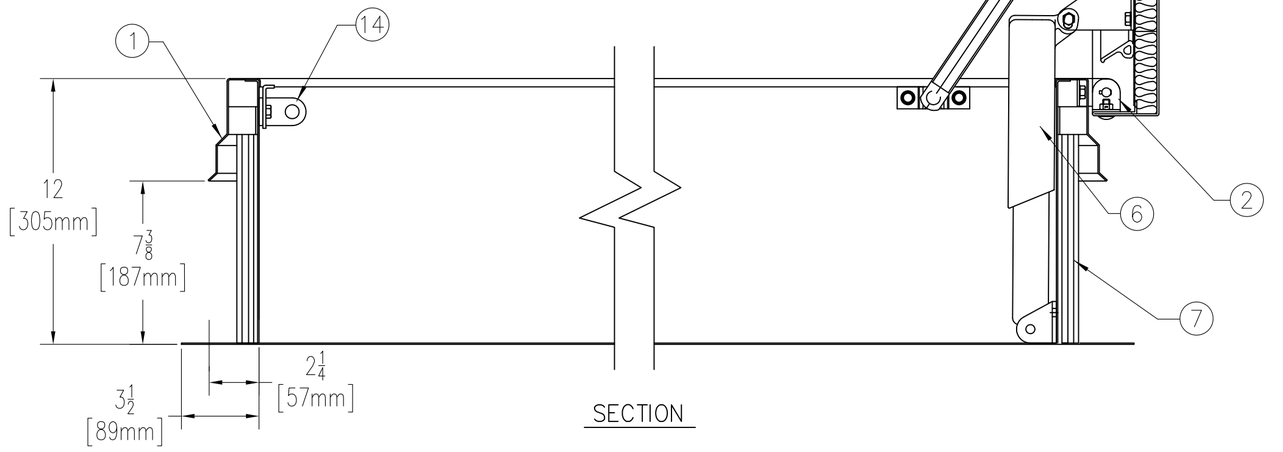

THIS DRAWING IS THE PROPERTY OF THE BILCO COMPANY AND INCORPORATES INFORMATION WHICH IS PROPRIETARY. PUBLICATION AND/OR PUBLIC DISTRIBUTION IN WHOLE OR IN PART IS EXPRESSLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF THE BILCO COMPANY. THE INFORMATION CONTAINED HEREIN REMAINS THE PROPERTY OF THE BILCO COMPANY. ALL RIGHTS RESERVED.

SPECIFICATIONS

1. FRAME W/ CAPFLASHING (CORNERS FULL WELDED)
   - SS–20 – 14 GAUGE P.B. GALV. STEEL
   - SS–40 – 14 GAUGE P.B. GALV. STEEL
   - SS–50 – 11 GAUGE ALUMINUM
2. PINTLE HINGE
3. GASKET (ALL AROUND COVER)
4. COVER GAUGE
   - SS–20 – 14 GAUGE P.B. GALV. STEEL
   - SS–40 – 11 GAUGE ALUMINUM
   - SS–50 – 11 GAUGE ALUMINUM
5. COVER LINER
   - SS–20 – 22 GAUGE P.B. GALV. STEEL
   - SS–40 – 18 GAUGE ALUMINUM
   - SS–50 – 18 GAUGE ALUMINUM
6. LIFTING MECHANISM WITH REINFORCED COMPOSITE TUBES AND COMPRESSION SPRINGS
7. 1" RIGID FIBERBOARD INSULATION
8. SLAM LATCH (SEE NOTE)
9. INSIDE AND OUTSIDE HANDLES W/ PADLOCK HASPS
10. ARM GUIDE BRACKET
11. 1" THICK FIBERGLASS COVER INSULATION
12. HOLD OPEN ARM W/ RED VINYL GRIP
13. NEOPRENE GASKET
14. LOCK STRIKE & PADLOCK HASP
15. BILCLIP® FLASHING SYSTEM
16. GUIDE ARM (IF REQ'D)

SHOP FINISH:
STEEL: RED OXIDE PRIMER
ALUMINUM: MILL FINISH
HARDWARE: ZINC PLATED & CHROMATE SEALED
(UNLESS OTHERWISE SPECIFIED)

THIS PRODUCT MAY BE INSTALLED ON EITHER A FLAT OR SLOPING ROOF. WHEN INSTALLED ON A SLOPE, THE HINGE SIDE MUST RUN PARALLEL WITH THE SLOPE. IF SLOPE EXCEEDS 30°, ADVISE FACTORY FOR MODIFICATION.

CUSTOMER:

P.O. N°

JOB:

SALES REP:

Manufacturers of Doors for Special Services
THE BILCO COMPANY
New Haven, Connecticut 06505

SINGLE LEAF ROOF SCUTTLE

TYPE SS SIZE ____ x ____
WIDTH x LENGTH
HINGE SIDE

QTY	TYPE	METAL
☐	SS-20	STEEL COVER/STEEL FRAME
☐	SS-40	ALUM. COVER/STEEL FRAME
☐	SS-50	ALUM. COVER/ALUM. FRAME

FOR SIZE LIMITATIONS ON THIS UNIT, CONSULT FACTORY

© 06–01–12 THE BILCO COMPANY